



The Trend of Lighting

An ISO 9001 : 2008 Certified Co.

# NAMAN

## LUMINAIRES INDIA

*Light up Your World*

MADE IN INDIA



**SINCE 40 YEARS**  
LED Catalogue- 2018



# Company Profile



Sri. Chandrakant N. Shah Founder of Darshan Electrical Industries takes pride in completing 10 years successfully in new venture **“Naman Luminares India”** for Manufacturing complete range of lighting solutions.

**“Naman Luminares india”** has the advantage of **40 years** of rich experience with the wide contacts and established relations across various Indian and multinational companies in the luminares industry.

Four decades of business experience will enable **“Naman Luminares India”** to keep pace with the changing demands and lifestyles of consumers. It will enable us to develop cutting edge technologies and innovate new concepts and designs, besides improving the existing products.

The advancement in LED technology being experienced in lighting world today is probably the biggest development in lighting technology in the past few years.

**“Naman Luminares India”** has been steadily growing despite tough competition from global players in the Indian market. this fact is proof of our customer focus and our management expertise of more than 40 years! We will continue to bring innovation in the field of manufacturing and thus remain pioneers in the years to come.

We offer a selection of high end indoor, outdoor LED range suitable for general lighting, ceiling lighting, surface lighting, spot lighting, cove lighting, industrial lighting, street lighting and flood lighting etc.

It is an pleasure to convey thanks to our customers for their continuous support to our company as result now we are continuously growing with our LED range.

## VISION :


**“Naman Luminares India”** has a vision to establish his name in the category of quality lighting manufacturers. The company is focusing to bring innovation to lighting by providing energy efficient and cost effective lighting solutions

## MISSION :

Our mission is to furnish high quality products on time, and at the lowest cost. To reach our objectives we will maintain a productivity on quality with full dedication, commitment and teamwork.

We aim to provide our customers with only the best products to ensure unparallel customer satisfaction.


approved by:  
**P.W.D., B.P.T., B.M.C., MHADA, M.I.D.C. & SSI UNIT.**

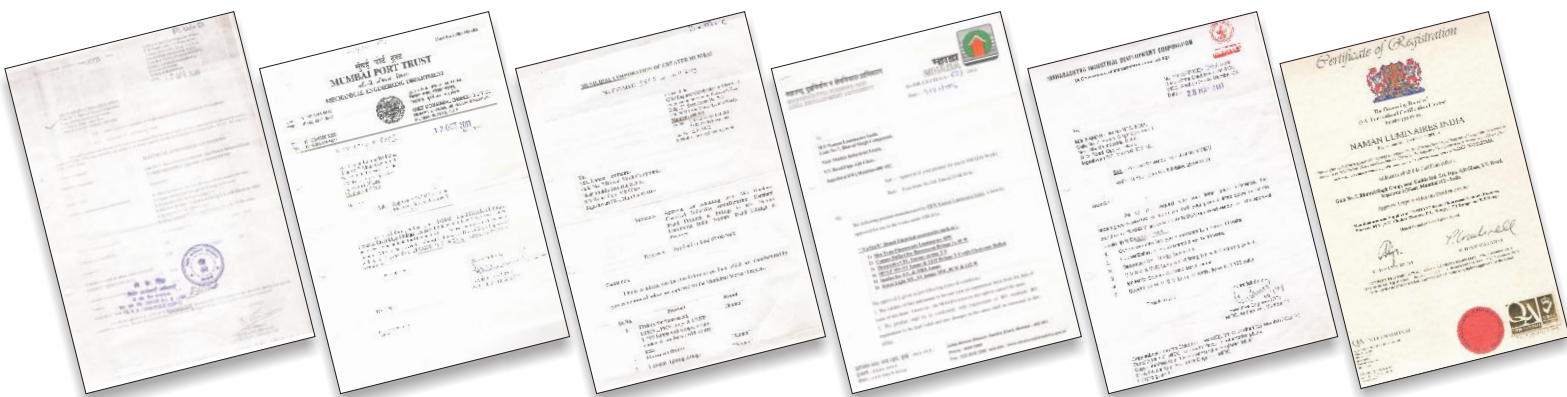

Thanks!

# NAMAN 1 NAMAN LED PANEL LIGHT (EDGE LIT)

## (A) SLIM PANEL LIGHT

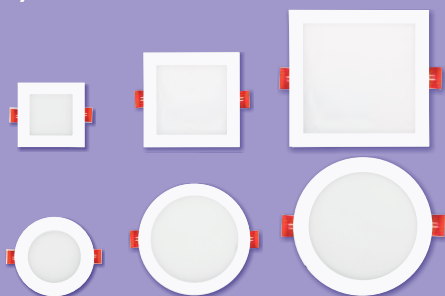

Code - Watt	Cut out L x W	Outer diameter (L x W x H)	Lumens
NSPL - 8 w	85 x 85	100 x 100 x 25	1200
NSPL - 8 w	90 x 90	100 x 100 x 25	1200
NSPL - 12 w	130 x 130	145 x 145 x 25	1800
NSPL - 12 w	130 x 130	145 x 145 x 25	1800
NSPL - 15 w	155 x 155	165 x 165 x 25	2400
NSPL - 15 w	160 x 160	175 x 175 x 25	2400
NSPL - 22 w	195 x 195	205 x 205 x 25	3600
NSPL - 22 w	195 x 195	210 x 210 x 25	3600

• Housing Materials : Aluminum Die-Casting      • LED Type: 0.2 W SMD LED 2835  
 • LED Source: Ever light / Epistar                      • Available with Philips/Osram/Fulham Driver  
 • IP- 20

Available Colour

- 2700K-3000K Warm White
- 4000K-4300K Neutral White
- 6000K-6500K Cool White

Shape

## (B) PANEL LIGHT



Code - Watt	Cut out L x W	Outer diameter (L x W x H)	Lumens
NPL - 8 w	95 x 95	110 x 110 x 25	1040
NPL - 12 w	135 x 135	150 x 150 x 25	1560
NPL - 15 w	160 x 160	180 x 180 x 25	2340
NPL - 22 w	200 x 200	220 x 210 x 25	3120
NPL - 30 w	280 x 280	300 x 300 x 25	5200


• Housing Materials : Aluminum Die-Casting      • LED Type: 0.5 W SMD LED 2835  
 • LED Source: Hongli / Epistar                      • IP- 20

Available Colour

- 2700K-3000K Warm White
- 4000K-4300K Neutral White
- 6000K-6500K Cool White

Shape

## (C) RIMLESS PANEL LIGHT

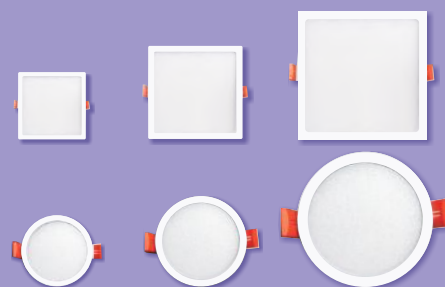

Code - Watt	Cut out L x W	Outer diameter (L x W x H)	Lumens
NRPL - 8 w	75 x 75	90 x 90 x 25	1000
NRPL - 15 w	125 x 125	145 x 145 x 25	1800
NRPL - 22 w	150 x 150	170 x 170 x 25	2700

• Housing Materials : Aluminum Die-Casting      • LED Type: 0.2 W SMD LED 4014  
 • LED Source: Epistar / Ever Light                      • IP- 20

Available Colour

- 2700K-3000K Warm White
- 4000K-4300K Neutral White
- 6000K-6500K Cool White

Shape

## (D) L/X PANEL LIGHT



Code - Watt	Replacement of	Cut out L x W	Outer diameter (L x W x H)	Lumens
NLXPL - 24 w	2 x 11 w PL	280 x 155	305 x 180 x 25	2600
NLXPL - 30 w	1 x 36 w PLL	495 x 135	510 x 150 x 25	5200
NLXPL - 30 w	2 x 36 w PLL	495 x 205	510 x 230 x 25	5200
NLXPL - 36 w	2 x 36 w PLL (2x2)	570 x 570	595 x 595 x 25	6240
NLXPL - 40 w	1 x 40 w TLD	1100 x 135	1210x150 x 30	

• Housing Materials : Aluminum Die-Casting      • LED Type: 0.5 W SMD LED 2835  
 • LED Source: Hongli / Epistar                      • IP- 20

Available Colour

- 2700K-3000K Warm White
- 4000K-4300K Neutral White
- 6000K-6500K Cool White

Shape

## 2 NAMAN LED SURFACE PANEL LIGHT (EDGE LIT)

### (A) SLIM SURFACE PANEL LIGHT (ONE Pc.)



Code - Watt	Outer diameter (L x W x H)	Lumens
NSSUPL - 8 w	90 x 90 x 30	1200
NSSUPL - 12 w	135 x 135 x 30	1800
NSSUPL - 15 w	160 x 160 x 30	2400
NSSUPL - 22 w	200 x 200 x 30	3600

• Housing Materials : Aluminum Die-Casting      • LED Type: 0.2 W SMD LED 2835  
 • LED Source: Ever light / Epistar                      • Available with Philips/Osram/Fulham Driver  
 • IP- 20

Available Colour

- 2700K-3000K Warm White
- 4000K-4300K Neutral White
- 6000K-6500K Cool White

Shape

### (B) SURFACE PANEL LIGHT



Code	Watt	Outer diameter (L x W X H)	Lumens
NSUPL - 8 w		115 x 115 x 40	1040
NSUPL - 12 w		155 x 155 x 40	1560
NSUPL - 15 w		185 x 185 x 40	2340
NSUPL - 22 w		225 x 225 x 40	3120
NSUPL - 30 w		305 x 305 x 40	5200

• Housing Materials : Aluminum Die-Cast + MS Box    • LED Type: 0.5 W SMD LED 2835  
 • LED Source: Hongli / Epistar    • IP- 20

Available Colour

- 2700K-3000K Warm White
- 4000K-4300K Neutral White
- 6000K-6500K Cool White

Shape

### (C) L / X SURFACE PANEL LIGHT



Code	Watt	Replacement of	Outer diameter (L x W X H)	Lumens
NLXSPL - 30 w		1 x 36W PLL	520 x 160 X 50	5200
NLXSPL - 30 w		2 x 36W PLL	520 X 235 X 50	5200
NLXSPL - 36 w		2 x 36W PLL (2x2)	600 X 600 X 65	6240

• Housing Materials : Aluminum Die-Cast + MS Box    • LED Type: 0.5 W SMD LED 2835  
 • LED Source: Hongli / Epistar    • IP- 20

Available Colour

- 2700K-3000K Warm White
- 4000K-4300K Neutral White
- 6000K-6500K Cool White

Shape

## 3 NAMAN LED DOWN LIGHT (BACK LIT)

### (A) SLIM DOWN LIGHT



Code	Watt	Cut out L x W	Outer diameter (L x W X H)	Lumens
NSDL - 8 w		95 x 95	110 x 110 x 35	1040
NSDL - 18 w		130 x 130	140 x 140 x 35	2340
NSDL - 24 w		160 x 160	175 x 175 x 35	3120


• Housing Materials : Aluminum Die-Casting    • LED Type: 0.2 W SMD LED 2835  
 • LED Source: Hongli / Epistar    • IP- 20

Available Colour

- 2700K-3000K Warm White
- 4000K-4300K Neutral White
- 6000K-6500K Cool White

Shape

### (B) TOP DOWN LIGHT

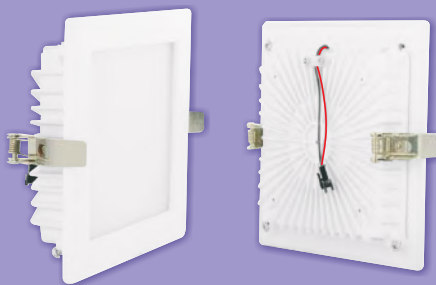

Code	Watt	Cut out L x W	Outer diameter (L x W X H)	Lumens
NTDL - 6 w		85 x 85	100 x 100 x 40	600
NTDL - 8 w		95 x 95	120 x 120 x 40	800
NTDL - 15 w		125 x 125	150 x 150 x 40	1500
NTDL - 18 w		145 x 145	170 x 170 x 40	1800
NTDL - 24 w		145 x 145	170 x 170 x 40	2400
NTDL - 30 w		175 x 175	200 x 200 x 40	3000

• Housing Materials : Aluminum Die-Casting    • LED Type: 0.2 W SMD LED 2835  
 • LED Source: Ever Light / Bridglux    • IP- 20  
 • Available with Philips/Osram/Fulham Driver

Available Colour

- 2700K-3000K Warm White
- 4000K-4300K Neutral White
- 6000K-6500K Cool White

Shape

### (C) RD DOWN LIGHT



Code	Watt	Cut out L x W	Outer diameter (L x W X H)	Lumens
NRDDL - 12 w		90 x 90	105 x 105 x 80	1560
NRDDL - 24 w		135 x 135	160 x 160 x 80	3120
NRDDL - 42 w		180 x 180	200 x 200 x 80	5460

• Housing Materials : Aluminum Alloy    • LED Type: 0.2 W SMD LED 2835  
 • LED Source: Epistar / Everlight    • IP- 20

Available Colour

- 2700K-3000K Warm White
- 4000K-4300K Neutral White
- 6000K-6500K Cool White

Shape



### (D) DEEP DOWN LIGHT



Code	Watt	Replacement of	Cut out	Outer diameter (L x W x H)	Lumens	Available Colour
NDDL - 10 w		1 x 11W PL	310 x 90	340 x 105 x 45	1560	2700K-3000K Warm White
NDDL - 20 w		2 x 11W PL	310 x 150	340 x 165 x 45	3120	
NDDL - 24 w		1 x 36 W PLL	495 x 135	525 x 165 x 50	3900	4000K-4300K Neutral White
NDDL - 30 w		2 x 36 W PLL	495 x 205	525 x 235 x 50	5200	6000K-6500K Cool White
NDDL - 36 w		2 x 36 W PLL (2 x 2)	570 x 570	595 x 595 x 60	6240	
NDDL - 48 w		3 x 36 W PLL (2 x 2)	570 x 570	595 x 595 x 60	7800	

- Housing Materials : MS With Powder Coating
- LED Type: 0.5 W SMD LED 2835
- LED Source: Hongli / Epistar
- IP- 20

Available Colour

Shape

## 4 NAMAN COB LED SPOT LIGHT

### (A) COB LED SPOT LIGHT



Code	Watt	Cut out	Outer diameter (L x W x H)	Shape	Type	Available Colour
NCSL-F- 1 w		25 x 25	30 x 30 x 20	■/●	FIXED BUTTON	2700K-3000K Warm White
NCSL-M- 1 w		35 x 35	40 x 40 x 20	●	MOVABLE BUTTON	
NCSL-F- 3 w		35 x 35	45 x 45 x 20	●	FIXED BUTTON	4000K-4300K Neutral White
NCSL-M- 3 w		50 x 50	70 x 70 x 35	■/●	MOVABLE	
NCSL-M- 6 w		65 x 65	85 x 85 x 40	■/●	MOVABLE	6000K-6500K Cool White
NCSL-M- 10 w		80 x 80	105 x 105 x 50	■/●	MOVABLE	
NCSL-M- 15 w		110 X 110	125 x 125 x 70	■/●	MOVABLE	
NCSL-M- 25 w		130 X 130	150 x 150 x 85	■/●	MOVABLE	Available With Philips / Osram / Fulham Driver
NCSL-M- 30 w		130 X 130	150 x 150 x 85	■/●	MOVABLE	
NCSL-M- 40 w		155 x 155	170 x 170 x 85	■/●	MOVABLE	

- Housing Materials : Aluminum Die-Casting
- Available With Philips / Osram / Fulham Driver
- LED Source: Cree / Bridgelux / Philips
- IP- 20

Available Colour

Shape

## 5 NAMAN COB LED SURFACE SPOT LIGHT

### (A) COB LED SURFACE SPOT LIGHT



Code	Watt	Outer diameter (L x W x H)	Shape	Available Colour
NCSSL - 3 w		65 x 65 x 25	■/●	2700K-3000K Warm White
NCSSL - 3 w Slim		60 x 60 x 10		
NCSSL - 5 w		75 x 75 x 25		

- Housing Materials : Aluminum Die-Casting
- LED Type: COB
- LED Source: Cree / Citizen
- IP- 20

Available Colour

Shape

## 6 NAMAN LED BATTEN LIGHT

### (A) T5 LED BATTEN




Code	Watt	Dimension (L x W x H)	Lumens	Available Colour
NT5 - 5 w		325 x 20 x 30 (1Ft.)	670	2700K-3000K Warm White
NT5 - 10 w		590 x 20 x 30 (2Ft.)	1280	
NT5 - 20 w		1190 x 20 x 30 (4Ft.)	2680	4000K-4300K Neutral White

- Housing Materials : Aluminum, Non Linkable Centre wire
- LED Type: 0.2 W SMD 2835 LED
- LED Source: Everlite / Epistar
- IP- 20

Available Colour

Shape

### (B) T8 LED BATTEN

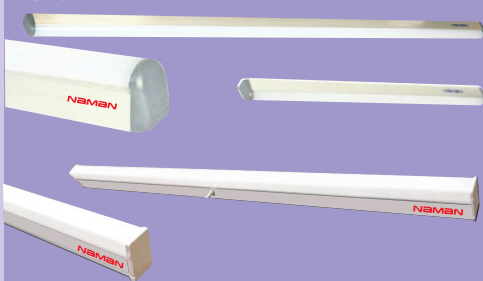

Code	Watt	Dimension (L x W x H)	Lumens	Available Colour
NT8 - 8 w		320 x 25 x 40 (1Ft.)	840	2700K-3000K Warm White
NT8 - 15 w		590 x 25 x 40 (2Ft.)	2240	
NT8 - 30 w		1150 x 25 x 40 (4Ft.)	4480	4000K-4300K Neutral White
NT8 - 24 w		1180 x 20 x 35 (4Ft.)	3000	

- Housing Materials : Heavy Aluminum Extrusion
- LED Type: 0.2 W SMD 2835 LED
- LED Source: Everlite / Epistar
- IP- 20

Available Colour

Shape

# NAMAN 7 NAMAN LED INDOOR / OUTDOOR LIGHTS

## (A) STREET LIGHT



Available With Naman Driver



Available With Philips/Osram/Fulham Driver

Code	Watt	Dimension (L x W X H)	St. light Pipe Dia (I.D.)	Lumens
NSL - 15 w	15 w	350 x 100 x 60	45	1800
NSL - 20 w	20 w	350 x 100 x 60	45	2400
NSL - 24 w	24 w	390 x 150 x 60	45	2850
NSL - 30 w	30 w	390 x 150 x 60	45	3600
NSL - 36 w	36 w	390 x 150 x 60	45	4300
NSL - 48 w	48 w	435 x 210 x 60	53	6000
NSL - 60 w	60 w	435 x 210 x 60	53	7200
NSL - 72 w	72 w	435 x 210 x 60	53	8600
NSL - 100 w	100 w	520 x 260 x 65	53	12000
NSL - 120 w	120 w	520 x 260 x 65	53	14400
NSL - 150 w	150 w	605 x 335 x 65	57	18000
NSL - 200 w	200 w	605 x 335 x 65	57	24000

- Housing Materials : Aluminum Die-Casting
- LED Source: Osram / Philips
- IP- 65
- LED Type: 1 W SMD 3030 LED
- Available with Philips/Osram/Fulham Driver
- With 4 KV Surge Protection Device Above 50 w (SPD)

Available Colour

2700K-3000K Warm White

6000K-6500K Cool White

Shape



## (A) NEW STREET LIGHT



Capsule Street Light

Street Light With Lens

CAPSULE STREET LIGHT			STREET LIGHT WITH LENS		
Code	Watt	Lumens	Code	Watt	Lumens
NCSL- 30 w	30 w	3600	NLSL- 20 w	20 w	2400
NCSL- 36 w	36 w	4300	NLSL- 30 w	30 w	3600
NCSL- 50 w	50 w	6000	NLSL- 50 w	50 w	6000
NCSL- 72 w	72 w	8600			

- Housing Materials : Aluminum Die-Casting
- LED Source: Osram / Philips
- IP- 65
- LED Type: 1 W SMD 3030 LED
- Available with Philips/Osram/Fulham Driver

Available Colour

2700K-3000K Warm White

6000K-6500K Cool White


Shape



## (B) FLOOD LIGHT



Available With Naman Driver

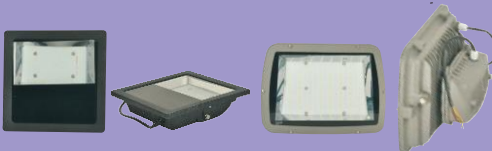

Available With Philips/Osram/Fulham Driver

Code	Watt	Dimension (L x W X H)	Lumens
NFL - 15 w	15 w	85 x 85 x 40	1800
NFL - 20 w	20 w	85 x 85 x 40	2400
NFL - 24 w	24 w	230 x 230 x 50	2850
NFL - 30 w	30 w	230 x 230 x 50	3600
NFL - 36 w	36 w	230 x 230 x 50	4300
NFL - 48 w	48 w	290 x 280 x 60	6000
NFL - 60 w	60 w	290 x 280 x 60	7200
NFL - 72 w	72 w	290 x 280 x 60	8600
NFL - 100 w	100 w	290 x 340 x 70	12000
NFL - 120 w	120 w	290 x 340 x 70	14400
NFL - 150 w	150 w	390 x 340 x 80	18000
NFL - 200 w	200 w	390 x 340 x 80	24000

- Housing Materials : Aluminum Die-Casting
- LED Source: Osram / Philips
- IP- 65
- LED Type: 1 W SMD 3030 LED
- Available with Philips/Osram/Fulham Driver
- With 4 KV Surge Protection Device Above 50 w (SPD)

Available Colour

2700K-3000K Warm White

6000K-6500K Cool White

Shape



## (C) HIGHBAY / LOWBAY LIGHTS INDOOR



Code	Watt	HIGHBAY	LOWBAY	Lumens
NHL - 50 w	50 w	315mm dia	420mm dia	5720
NHL - 100 w	100 w	315mm dia	420mm dia	11440
NHL - 150 w	150 w	315mm dia	420mm dia	17160

- Housing Materials : Aluminum Die-Casting
- LED Source: Osram / Philips
- IP- 20
- LED Type: 1 W SMD 3030 LED
- Available with Philips/Osram/Fulham Driver
- With 4 KV Surge Protection Device Above 50 w (SPD)

Available Colour

2700K-3000K Warm White

6000K-6500K Cool White

Shape



## (D) INDUSTRIAL LIGHTS INDOOR



Code	Watt	Replacement of	Dimension (L x W X H)	Lumens
NIL - 24 w	24 w	1 x 40 w	1180 x 70 x 40	3000
NIL - 48 w	48 w	2 x 40 w	1180 x 100 x 40	6000

- Housing Materials : Aluminum Die-Casting
- LED Source: Everlight / Epistar
- IP- 20
- LED Type: 0.2 W SMD 2835 LED

Available Colour

6000K-6500K Cool White

Shape



### (A) ZOOM LIGHT



WATT  
30 W.

Available Colour

- 2700K-3000K Warm White
- 6000K-6500K Cool White

• IP 20

### (D) INGROUND / WALKOVER LIGHT



WATT  
1x1 W.  
3x1 W.  
1x3 W.  
3x3 W.  
6x1 W.  
6x3 W.  
9x1 W.  
9x3 W.  
12x1 W.

Available Colour

- 2700K-3000K Warm White
- 6000K-6500K Cool White
- ● ● RGB

• IP 65  
• ALU.CASTING HOUSING

### (B) COB LED TRACK LIGHT



WATT  
9 W.  
16 W.  
24 W.  
30 W.

Available Colour

- 2700K-3000K Warm White
- 6000K-6500K Cool White

• IP 20

### (E) UNDERWATER LIGHT



(1) SURFACE LIGHT

(2) CONCEALED LIGHT

WATT  
1x1 W.  
3x1 W.  
3x3 W.  
6x1 W.  
6x3 W.  
9x1 W.  
9x3 W.  
12x1 W.

Available Colour

- 2700K-3000K Warm White
- 6000K-6500K Cool White
- ● ● RGB

• IP 68  
• ALU.CASTING HOUSING

### (C) SUSPENSION LIGHT



(1) LINEAR SUSPENSION LIGHT

(2) ROUND HANGING SUSPENSION LIGHT

WATT  
30 W.  
45 W.

Available Colour

- 2700K-3000K Warm White
- 4000K-4300K Neutral White
- 6000K-6500K Cool White

DIAMETER  
12"

• IP 20

### (F) BOLLARD FITTING



1) 2) 3) 4) 5) 6)

HEIGHT  
1 Ft.  
2 Ft.  
3 Ft.

Available Colour

- 2700K-3000K Warm White
- 6000K-6500K Cool White

• IP 65  
• POLYCARBONATE BODY / MS BODY

## 9 NAMAN LED DECORATIVE OUTDOOR LIGHTS

### (A) BULKHEAD FITTING



WATT  
10 W. ONE LINE  
10 W. TWO LINE  
10 W. THREE LINE  
10 W. FOUR LINE  
8 W. CAPSULE  
12 W. CAPSULE

Available Colour

- 2700K-3000K Warm White
- 6000K-6500K Cool White

• IP 65  
• POLYCARBONATE BODY

### (G) WALL LIGHT/ UP & DOWN LIGHT



WATT  
4 W. 4 WAY  
2 W. 2 WAY  
3 W. 2 WAY

Available Colour

- 2700K-3000K Warm White
- 6000K-6500K Cool White

• IP 65

### (B) AVIATION LIGHT



WATT LED  
10 W. 302  
20 W. 604  
DOUBLE

Available Colour

- Red

• IP 65  
• PIPE DIA: ID 20mm  
• PIPE DIA: ID 30mm

### (H) GATE LIGHT



1) 2) 3) 4) 5) 6)

1) 12" BLACK TOPSY  
2) 12" LINER LITE HOUSE  
3) 8" MUSHROOM  
4) 8" MUSHROOM  
5) JALI TYPE  
6) CUBE - 6"x8"  
CUBE - 9"x11"

Available Colour

- 2700K-3000K Warm White
- ● 6000K-6500K Cool White

• IP 65

### (C) SPIKE LIGHT & UP LIGHTER



WATT  
3x1 W.  
1x3 W.  
6x1 W.  
9x1 W.

Available Colour

- 2700K-3000K Warm White
- 6000K-6500K Cool White

• IP 65

### ADVANTAGES OF LED


- long life > 50000 hours
- Economical high energy saving
- Low power consumption & Heat distribution
- LED emits more light per watt as compared to any other lamp
- LED is green and environment friendly No Lead, No mercury, No environment pollution
- LED is available with multi color temperature options for various application delivering more comfort.

# NAMAN 10 NAMAN FLEXIBLE LED STRIP LIGHT

## (A) LED STRIP LIGHT



Lamp Type	No. of Lamp / per Meter	Watt & Lumen / Per Lamp	Watt per Meter
5050	30	0.25 w, 22-24 Lm	7 w
5050	60	0.25 w, 22-24 Lm	14 w
2835	60	0.1 w, 20-22 Lm	6 w
2835	120	0.1 w, 20-22 Lm	12 w
2835	204	0.1 w, 20-22 Lm	21 w
3014	120	0.1 w, 10-12 Lm	12 w
3014	204	0.1 w, 10-12 Lm	21 w



## 11 NAMAN SMPS & LED DRIVER

### (A) SMPS FOR LED STRIP



AMP	Dimension (L x W X H)	OUTPUT VOLTAGE	OUTPUT WATTAGE
1 AMP	80 x 25 x 25	12 V DC	12 W
2 AMP	110 x 45 x 25	12 V DC	24 W
3 AMP	170 x 35 x 35	12 V DC	36 W
4 AMP	170 x 35 x 35	12 V DC	48 W
5 AMP	190 x 40 x 35	12 V DC	60 W
6.5 AMP	195 x 40 x 35	12 V DC	72 W
8 AMP	190 x 55 x 45	12 V DC	96 W
10 AMP	190 x 55 x 45	12 V DC	120 W
12 AMP	200 x 55 x 45	12 V DC	144 W
14 AMP	200 x 105 x 85	12 V DC	168 W
20 AMP	165 x 165 x 85	12 V DC	240 W

### (B) LED DRIVER



Watt	Output Voltage	Output Current
8 W- 24 W	20 V- 72 V	300 mA
12 W- 18 W	25 V- 40 V	300 mA
12 W- 18 W	25 V- 40 V	450 mA
18 W- 25 W	30 V- 54 V	450 mA
18 W- 25 W	30 V- 54 V	600 mA
20 W- 30 W	25 V- 45 V	700 mA
26 W- 36 W	40 V- 60 V	600 mA
30 W- 50 W	48 V- 85 V	600 mA
30 W- 50 W	48 V- 85 V	700 mA

### TERMS & CONDITION :

- This catalogue / price list supersedes our earlier catalogue / price list.
- The company reserves the right to change the catalogue / price list without prior notice.
- Care has been taken to ensure that the information contained within is correct.
- Photograph shown here in are indicative. specifications can be changed without prior notice as led is a dynamic & evolving technology
- Given lumens are calculated by considering white led source. it may differ for other color.
- This catalogue has been totally designed to help you more easily to select the "NAMAN luminaires india" range of products to meet your requirement and specification.
- All dimension are in millimeter (mm)

WE ARE NOW AVAILABLE ON :

LIKE US ON :

FOLLOW US ON :



Mfd. By.: **NAMAN LUMINAIRE INDIA**

Address: Gala No.7, Bhuval Singh Compound, Near Shukla Industrial Estate, S. V. Road, opp. Ajit Glass, Jogeshwari (W), Mumbai- 400 102.

Customer care No. : 022-2678 3234 / 022-2677 3239

Email: [naman@namanlighting.com](mailto:naman@namanlighting.com) website : [www.namanlighting.com](http://www.namanlighting.com)